



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Riviera Low Profile Economy Wrap RIVL Series

Features

This low profile, clean appearance, surface mounted wrap provides high light levels with a clear prismatic lens. It can be used in various residential applications. Fixture mounts to standard junction box (not included).

Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections must be made inside the junction box (not included).

Finish

Housing is finished in lighting grade white baked gloss enamel paint.

Diffuser

Acrylic diffuser is .060" thick prismatic diamond pattern. Diffuser rests in position on the end cap flange and is removed by a lift and shift motion.

Electrical

This unit is wired with a constant current low voltage electronic LED driver. 120-277V universal voltage 0-10V dimmable driver.

Lamping

Fixture includes LED modules capable of producing:
2 ft. - 26W, 2400 source lumens
4 ft. - 40W, 3600 source lumens
4000K (CCT), Rated for 50,000 Hrs., 90 CRI.


Certification

cETLus listed
ENERGY STAR® qualified
Title 24 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions subject to change without notice.

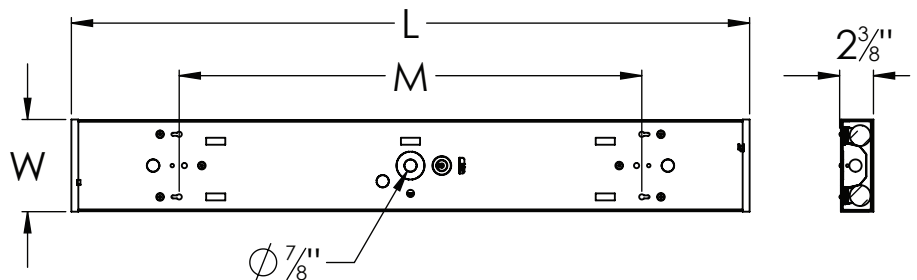

Ordering Information:

White	LED	Source Lumens	CCT	L	W	H
RIVL052424L40MV	26W	2400	4000K	24"	5-3/8"	2-3/8"
RIVL054836L40MV	40W	3600	4000K	48"	5-3/8"	2-3/8"