

INSTALLATION INSTRUCTION

401-LED PENDANT

PD401614

dweLED

WARNING

IMPORTANT: NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the "OFF" position and unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.

CAUTION

- All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn out or broken. Failure to follow this instruction could invalidate the ETL/CETL listing of this fixture.

CAUTION When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.

AVERTISSEMENT

IMPORTANT : Coupez l'électricité avant TOUTE manipulation.

- Lisez toutes les instructions avant d'installer.
- Système est destiné à être installé par un électricien qualifié en conformité avec le code national de l'électricité et les règlements locaux.
- Accédez au panneau central de disjoncteurs ou de fusibles de votre demeure et placez l'interrupteur principal en position d'arrêt (« OFF »).
- Placez l'interrupteur mural en position d'arrêt (« OFF »).

MISE EN GARDE

- Toutes les pièces doivent être utilisées tel qu'il est indiqué dans ces instructions. Ne remplacez pas les pièces, n'en laissez pas de côté et ne les utilisez pas si elles sont usées ou brisées. Le non-respect de ces instructions peut annuler l'homologation ETL/CETL du luminaire.

MISE EN GARDE

Ors de la manipulation de l'appareil, ne pas appliquer de pression à la LED, tenir l'appareil par la seule base.

ADVERTENCIA

IMPORTANTE: NUNCA intente hacer trabajos sin desconectar el suministro eléctrico.

- Lea y comprenda todas las instrucciones e ilustraciones por completo antes de proceder con el ensamblaje e instalación de esta lámpara.
- Sistema está diseñado para ser instalado por un electricista calificado, de acuerdo con el código eléctrico nacional y las normas locales.
- Diríjase a la caja de fusibles o a la caja del interruptor de circuito principal en su hogar. Coloque el interruptor de alimentación principal en la posición "OFF" (APAGADO).
- Coloque el interruptor de la pared en la posición "OFF" (APAGADO).

PRECAUCIÓN

- Todas las piezas deben usarse como lo indican estas instrucciones. No reemplace las piezas, no omita piezas durante la instalación ni utilice piezas gastadas o rotas. El incumplimiento de esta indicación podría invalidar la calificación ETL/CETL esta lámpara.

PRECAUCIÓN Al manipular el aparato, no aplique presión a los LED, mantenga el aparato en la base sólo.

Hardware	A	B	C	D	E
	Wire Connector(P3) QTY:4pcs	Junction Box Screw QTY:4pcs	Mounting Screw QTY:1 Extra	Acrylic Screw QTY:8+1 Extra	Wire Connector(P1) QTY:4pcs

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761

INSTALLATION INSTRUCTION

401-LED PENDANT

PD401614

dweLED

PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture. Including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any parts necessary for installation.

MOUNTING THE FIXTURE(Fig.1)

3. Take the acrylic out of the package. Insert the acrylic into the fixture with a little force in the direction shown in the diagram(Fig.1). Then tighten the acrylic screws(D). Repeat this step until 8 acrylic sheets are installed.

Note: When tighten the screws, it is necessary to avoid applying excessive force, as it may cause the screws to slip.

4. Take the four sections of the suspension rods out of the package.

Select the number of connection hangers as needed. Pass the power cords through the hanger and then tighten the hanger. Connect the canopy to the rod.

5. Take the canopy out of the package. Remove the mounting screw (C) from the canopy.

6. Secure the mounting plate to the junction box with the junction box screws.(B)

Note:(i)Using any other non-original-manufacturer provide junction box screw may result in safety issue;

(ii)The side of the mounting plate marked"GND"must face out.

7. Adjust the length of power cord as needed. Then reconnect the wires as shown in the diagram. (Fig.3)(Fig.4)

CONNECTING THE WIRES(Fig.3)

8. This fixture has four color temperature(2700K-3000K-3500K-4000K). Remove the cover prior to adjust the color temperature as needed. Then reattach the cover after the adjustment is made.

Note:The power must be off to change the color temperature.

9. Hang the safety rope buckle on the mounting plate. Connect the IC module's in/out wires to junction box wires as shown in Fig.3. Make sure that all wires connectors(A) are secured.

10. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. Otherwise,connect the fixture's ground wire directly to the mounting plate using the green screw provided.

11. After wires are connected, tuck them carefully inside the junction box.

COMPLETING THE INSTALLATION(Fig.1)

12. Finally, fix the canopy with the mounting screw(C).




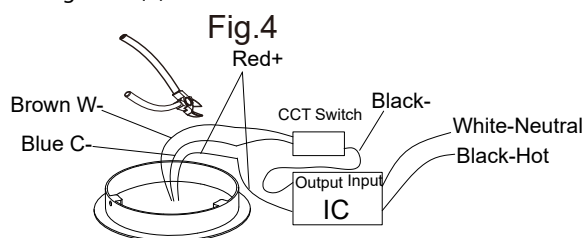


Fig.2 Wiring

Fixture Wires Black or Smooth	House Wires Black (Hot)
Fixture Wires White or Ribbed	House Wires White (Neutral)
Fixture Wires Bare Wire (Ground)	House Wires Green or Bare Copper (Ground)

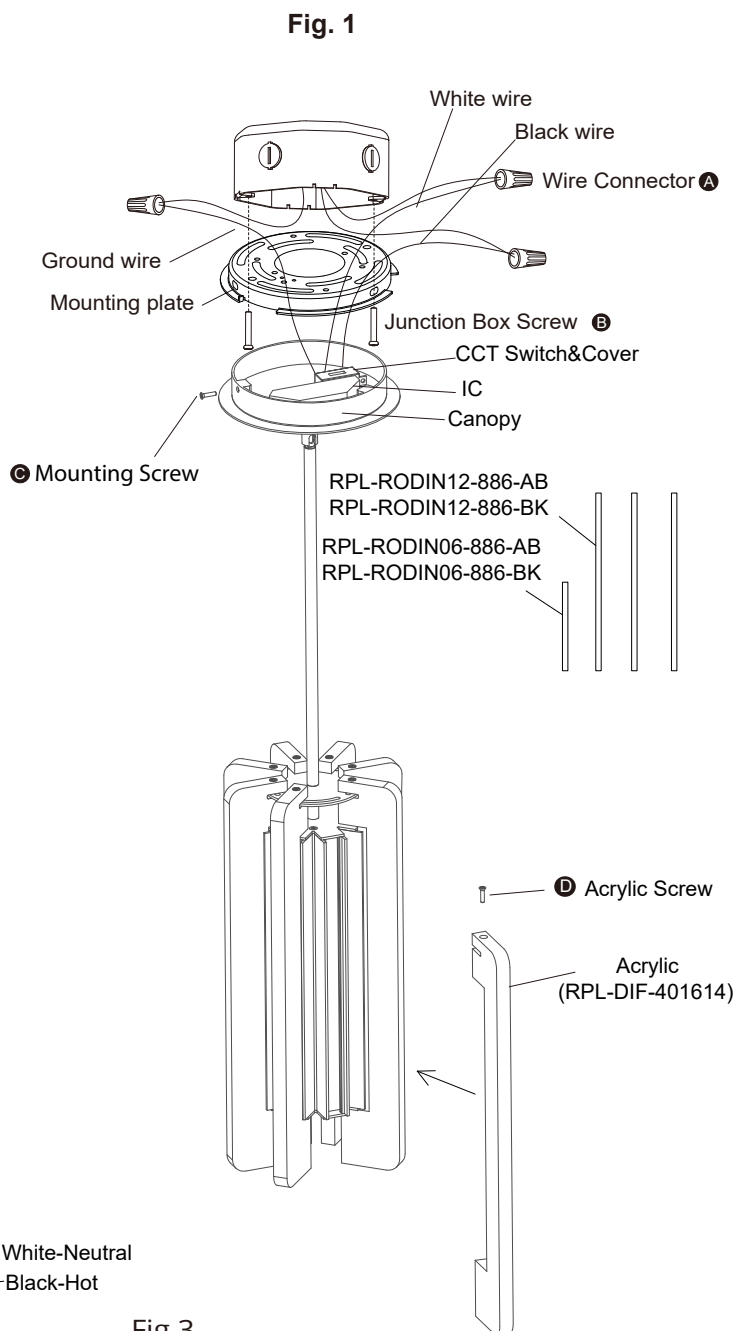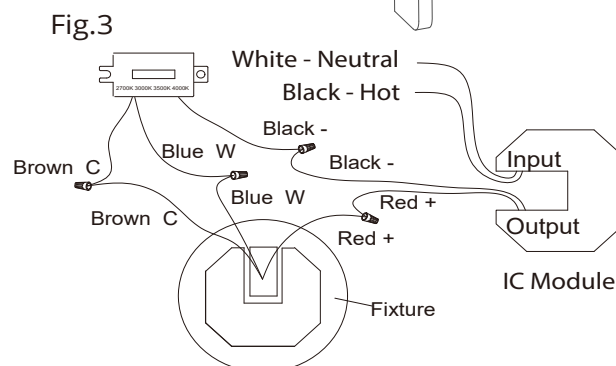

Mounting Plate Dimension



wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761