


VOLVER SMALL & MEDIUM FLUSH MOUNTS

KWFM499; KWFM581


General Product Information



Intertek



SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION




INDOOR



DAMP LOCATION SAFE



NEC COMPLIANT JUNCTION BOX



DIMMABLE
(LED, ELV, TRIAC & 10V)



INTEGRATED LED
NO BULBS REQUIRED



PLEASE SEE
visualcomfort.com
FOR PRODUCT
SPECS



CLEAN WITH SOFT,
DRY CLOTH ONLY. NO
HARSH CHEMICALS!



BEST PRACTICE:
HANDLE FIXTURE
WITH GLOVES



Product Warranty



FCC Statement

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD
SCREWDRIVER



PENCIL/MARKER



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



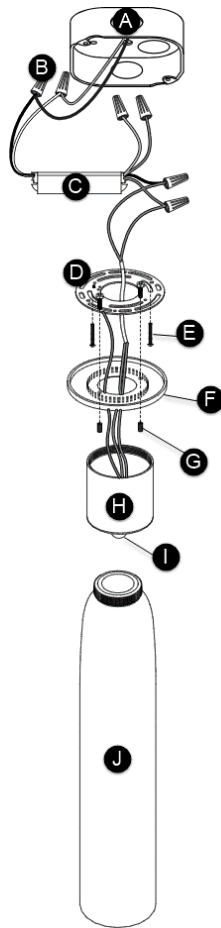

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate
- E. Mounting Screws
- F. Fixture Backplate
- G. Set Screws
- H. Fixture Base
- I. LED Assembly
- J. Glass Shade

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture backplate.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire (white) to neutral power line wire
 - b) Hot driver wire (black) to hot power line wire
3. Secure the mounting plate to the junction box using the mounting screws, ensuring the driver output wires are accessible.
4. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
5. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Black (negative) driver wire (output) to blue fixture wire
 - b) Red (positive) driver wire (output) to red fixture wire
6. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not using a dimmer.
7. Carefully tuck and all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Mount the fixture backplate onto the mounting plate and secure it in place by installing the set screws.
2. Screw the fixture base onto the fixture backplate.
3. Then screw the shade into the fixture base to complete the installation.