ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed.
However, the installation instructions do apply to this product.

60599 61919

- **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Thread the four mounting screws about 1/4” into the pre-drilled holes in the mounting plate spaced the same distance apart as the small holes in the canopy. Hold mounting plate up against to the ceiling aligning the two thread holes on the junction box with appropriate slots on the mounting plate, use a pencil to mark the hole located near mounting plate on the ceiling for drilling. Set aside the mounting plate and drill four holes into the ceiling, then insert plastic anchors into the holes.
3. Attach the mounting plate to the junction box with two junction box screws and four wood screws as shown, tighten screws securely with the screwdriver. The side of the mounting plate marked "GND" must face out. **The junction box is not included.**
4. Attach the joint pipe(A) into the top hole of the shade(C), lock it securely with the finial(D), using the same method install the others joint pipes. Raise the canopy onto the end of joint pipes, aligning the mounting holes, lock it securely with the spring shims and hex nuts. Now, catch the lamp holder’s(E) wires, then through the pipe(B) and shade’s center big hole and canopy’s center hole, by turning them clockwise until tight.
5. While holding the fixture body towards the ceiling, connect the electrical wires as Shown in **Fig.2**, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your junction box has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture’s ground wire directly to the mounting plate with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
6. Raise the fixture body onto the junction box, aligning screws on mounting plate with mounting holes in canopy and lock it securely with the column nuts.
7. Install the light bulbs(not included) in accordance with the fixture specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**
8. Holding the top chain of the rattan weave shade(F) and(G), hooked to the inside small ring of the top shade.

Your installation is now complete. Return power to the junction box and test the fixture.

FIG.1


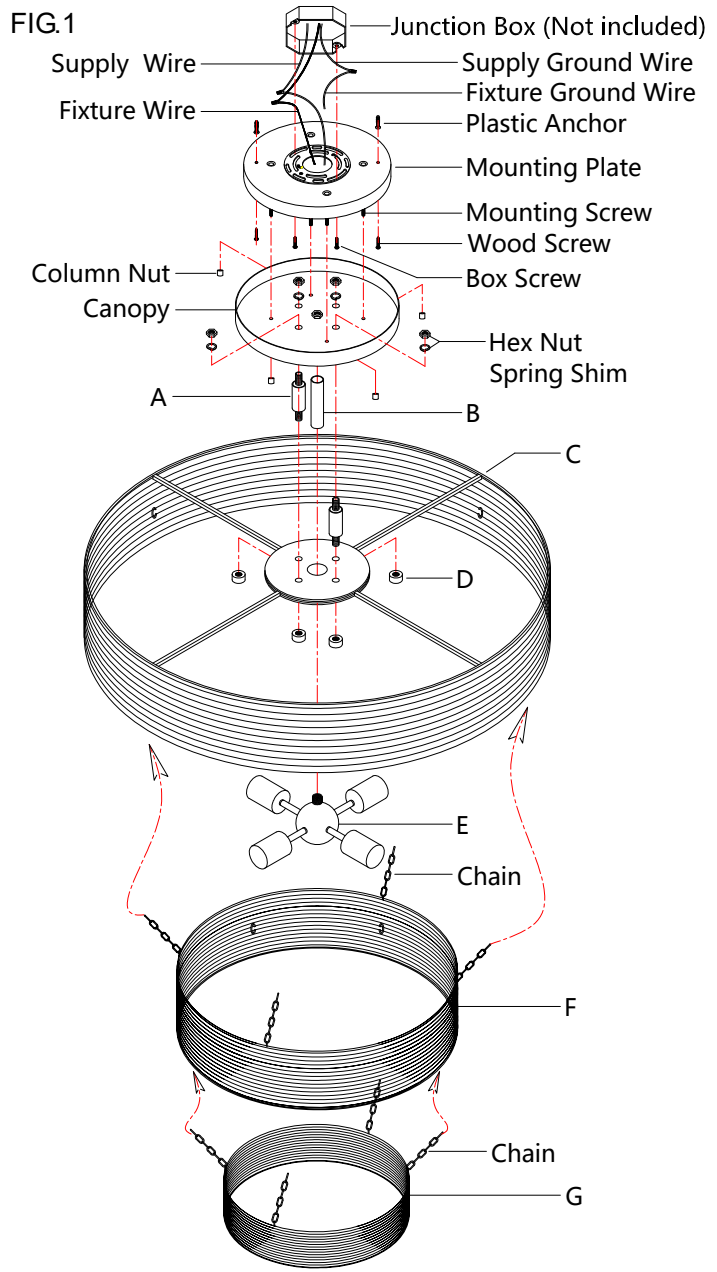


FIG.2



Thank you for purchasing a **LIVEX** product.
Need assistance with parts or assembly? Please call customer service at: **800-761-8056**
Or visit us on-line at: WWW.LIVEXLIGHTING.COM

©COPYRIGHT ALL RIGHTS RESERVED.**LIVEX** LIGHTING,INC.

DOC20251260599