


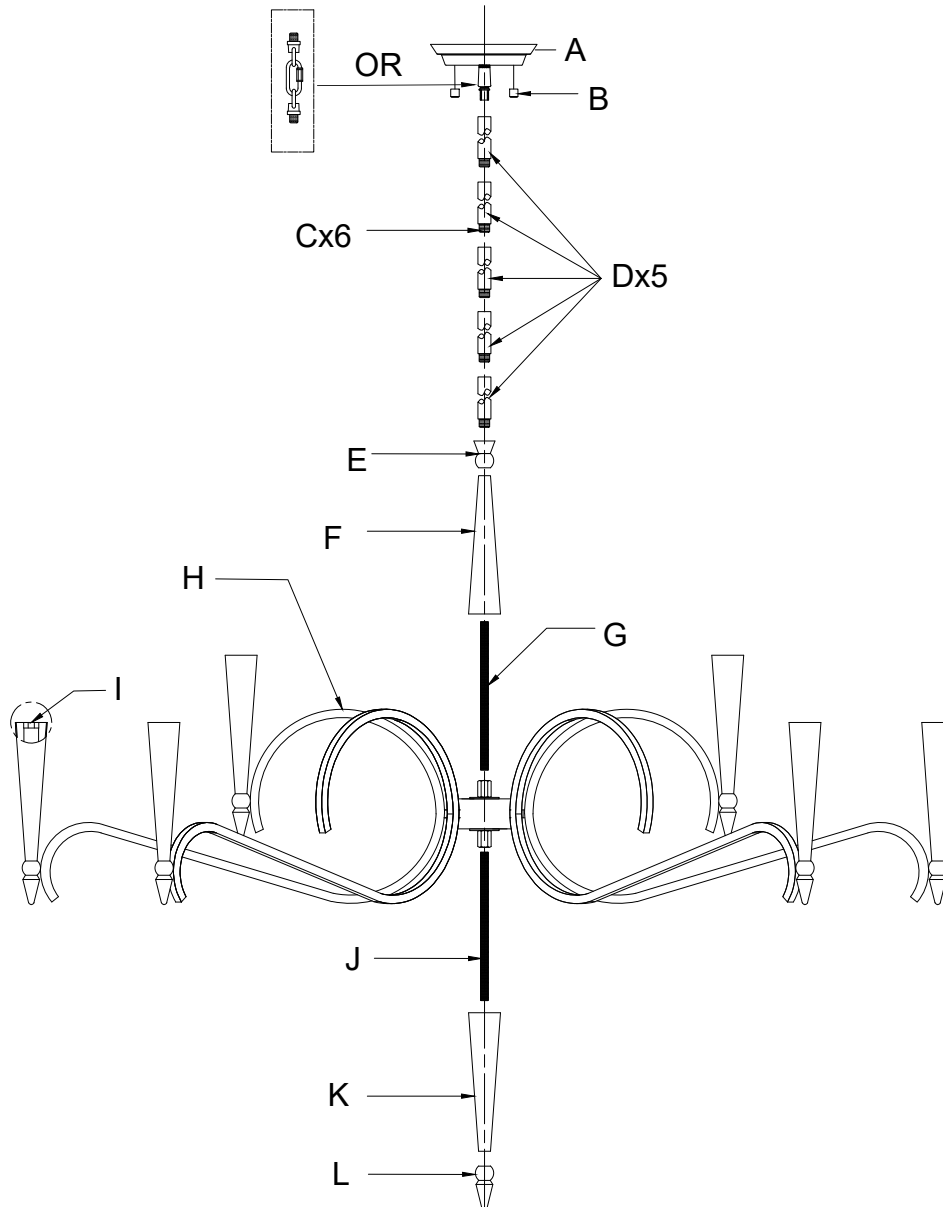

ASSEMBLY INSTRUCTIONS

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Turn the power to the installation point OFF.
3. Thread the nipple (J) into the coupling of fixture (H). Place the column (K) over the nipple (J) then secure with finial (L).
4. Thread the nipple (G) into the coupling of fixture (H). Place the column (F) over the nipple (G) then secure with coupling (E). Then thread the tubes (C,D) together , and thread them into the coupling (E). Thread the top end of the extension rods onto the canopy (A).
5. Place the canopy (A) over the crossbar , and allowing the mounting screws to go through canopy (A),then secure with round nuts (B).
6. Install the bulb (not included) into the socket (I).
7. Refer to the additional installation instructions included with the product of wiring and installation.
8. Restore power to the installation point and retain this sheet for future reference.