








PAVONA S9118- __ __R



THIS DESIGN IS THE PROPRIETARY
TRADE DRESS/TRADEMARK OF
W SCHONBEK LLC.

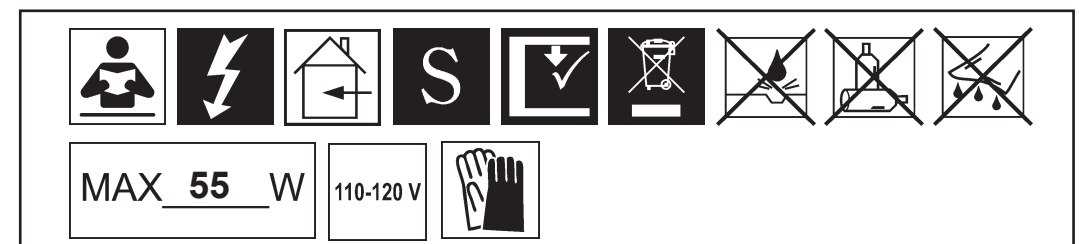

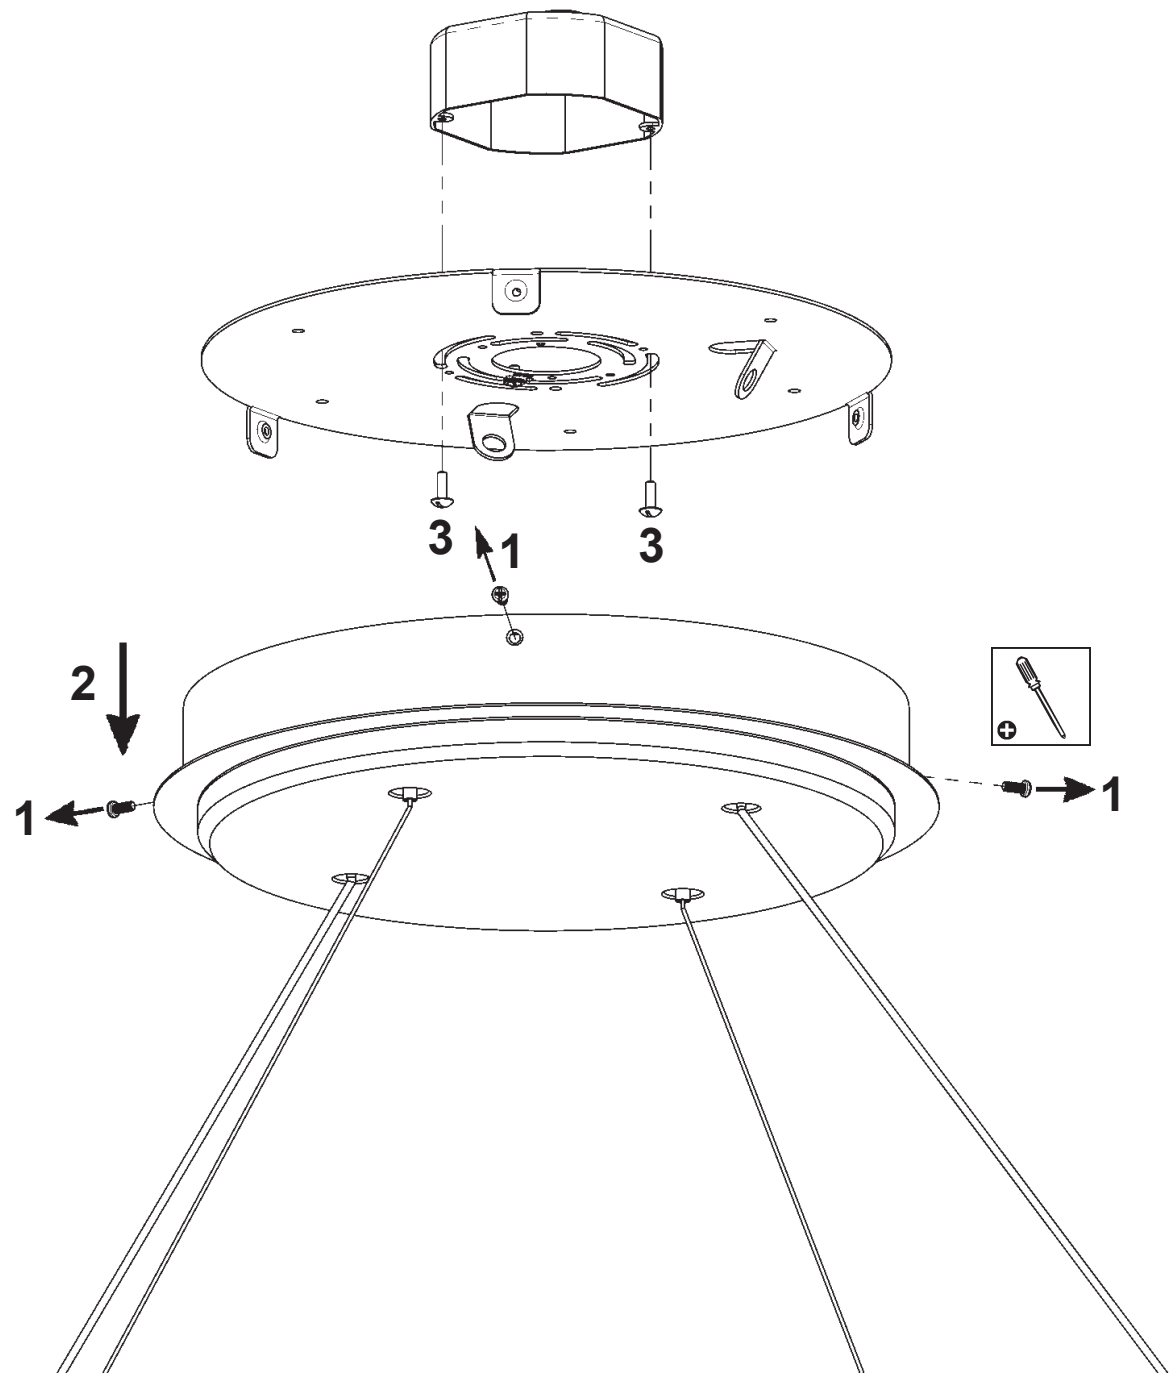

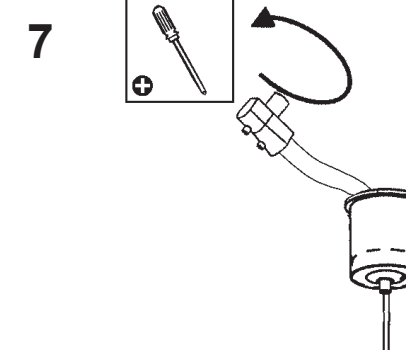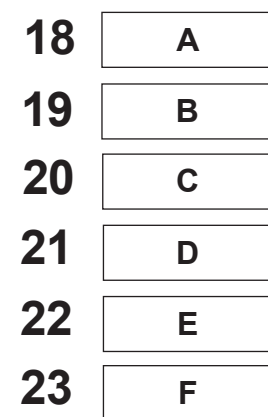


Once the fixture is at desired height, trim cables leaving 2" protruding from the cable grippers. Install sleeve over and terminal connector over cable. See illustration above.

ONCE THE CABLES ARE CUT THE FIXTURE HEIGHT CAN NO LONGER BE ADJUSTED!

8 SELECT DESIRED LED COLOR TEMPERATURE. WHEN SELECTING COLOR TEMPERATURE, ENSURE THAT BOTH SWITCHES ARE SET TO THE SAME TEMPERATURE.

NOTE: FIXTURE POWER MUST BE OFF BEFORE CHANGING THE CCT SETTING.

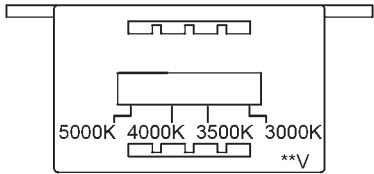

3000K = WARM
3500K = WARM/NATURAL
4000K = NATURAL
5000K = DAYLIGHT

