



Project:

## Thin-Line Indirect LED Wall Bar

SKU: 2814.25-6

One of our best selling families, Thin-Line is a system of minimally scaled LED indirect light wall bars, [uplight/downlight wall bars](#), and [pendants](#). Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. Indirect configurations reflect light back onto the wall or mounting surface to radiate indirect illumination.

Learn more: <https://sonnemanlight.com/thin-line-indirect-led-wall-bar>

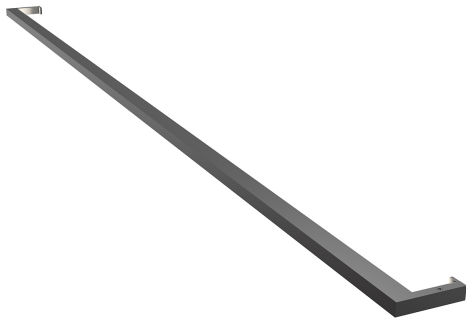

### Dimensions

|                              |       |
|------------------------------|-------|
| Height                       | 0.75" |
| Width                        | 72"   |
| Extends                      | 3.5"  |
| Minimum Extension            | 3.5"  |
| Maximum Extension            | 3.5"  |
| Size                         | 6'    |
| Canopy/Backplate/Base Width  | 1"    |
| Canopy/Backplate/Base Height | 0.75" |

### Electrical Specs

|                                 |              |
|---------------------------------|--------------|
| Bulb(s) Included?               | Yes          |
| Bulb 1 Type                     | Integral LED |
| Total LED, Bulb or Socket Count | 1            |
| Input Voltage                   | 120VAC       |
| Wattage                         | 36           |
| Initial Lumens                  | 2220         |
| Delivered Lumens                | 1350         |
| Kelvin                          | 3000K        |
| CRI                             | 90           |
| Power Supply Type               | Driver       |
| Power Supply Quantity           | 1            |
| Power Supply Location           | Remote       |
| Dimming Type                    | TRIAC/ELV    |

### Installation

|                          |                               |
|--------------------------|-------------------------------|
| Installation             | Licensed electrician required |
| Installation Orientation | Any Orientation               |

### Diffuser(s), Shade(s) and Lens(es)

|               |                 |
|---------------|-----------------|
| Diffuser Type | Optical Acrylic |
|---------------|-----------------|

### Shipping

|                       |               |
|-----------------------|---------------|
| Carton 1 L x W x H    | 75" X 7" X 4" |
| Carton 1 Gross Weight | 5 LBS         |

### General Listings

|               |                   |
|---------------|-------------------|
| Color/Finish  | Satin Black (.25) |
| Features      | Damp Rated        |
| Certification | C-ETL-US          |

### Available Finishes

|                    |                                                                   |
|--------------------|-------------------------------------------------------------------|
| Available Finishes | Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03) |
|--------------------|-------------------------------------------------------------------|

### Available Color Temperatures

|                              |                     |
|------------------------------|---------------------|
| Available Color Temperatures | 2700K, 3000K, 3500K |
|------------------------------|---------------------|

## Options In This Family

| SKU          | Size | Wattage | CRI | Delivered Lumens |
|--------------|------|---------|-----|------------------|
| 2814.XX-3    | 3'   | 19      | 90  | 670              |
| 2814.XX-4    | 4'   | 22      | 90  | 900              |
| 2814.XX-4-27 | 4'   | 22      | 90  | 900              |
| 2814.XX-4-35 | 4'   | 22      | 90  | 900              |
| 2814.XX-6    | 6'   | 36      | 90  | 1350             |
| 2814.XX-8    | 8'   | 47      | 90  | 1800             |